


TX690sr

HYDRAULIC DRIFTER SPECIFICATIONS

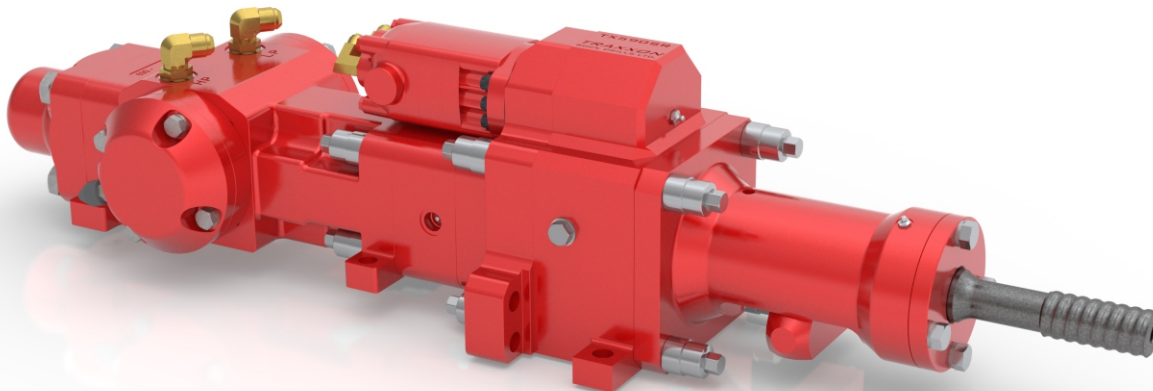

FEATURES and SPECIFICATIONS:

- Separate and easily removable flushing swivel allows the use of high pressure air, grout, or water and eliminates the possibility of back-flushing contaminants into the hammer body.
- Built in swivel shortens the drill string, as compared to separate drill and swivel designs.
- Sealed and grease lubricated rotation housing.
- Utilizes proven Sandvik HL700 drifter shanks and accumulator diaphragms.

HOLE SIZE:	64 - 102 mm, 2.5 - 4 in
SHANK ADAPTERS:	T38, T45, T51
IMPACT FREQUENCY:	44 - 56 Hz
POWER CLASS:	18 kW
OPERATING PRESSURE:	120 - 170 bar
SHANK LUBRICATION:	Gease, Air / Oil
FLUSHING:	Air, Water, Grout
WEIGHT:	235 kg, 520 lbs

Rotation Motor Size	MAX Output Torque @ 2500 psi	MAX RPM with 16 gpm Hydraulic Flow
130cc	500 ft/lbs	230 rpm
160cc	558 ft/lbs	187 rpm
195cc	688 ft/lbs	154 rpm
245cc	860 ft/lbs	122 rpm
305cc	950 ft/lbs	98 rpm